

## Automating Solder Reflow Simulation per IPC/JEDEC J-STD-020D.1

### Introduction

The purpose of this paper is to demonstrate the reflow soldering process on Surface Mount Devices (SMD) per IPC / JEDEC J-STD-020D.1. SMD suppliers subject their products to this test for classification and preconditioning (JESD22-A113F) purposes. This standard requires SMDs to be reflowed three (3) times and then evaluated for quality compliance. Each of the three reflow cycles must be nearly identical to one another in order to maintain the profile tolerances specified in the standard. By automating the three cycles within a reflow oven, consistency is attainable, chance of operator errors that may invalidate the test are eliminated, and efficiency greatly improved.

### Set Up

A total of 80 QFN-64 SMDs were placed on 2 carriers (see Figure 1). The carriers were then placed onto the ovens loading tray with 30 AWG K-type thermocouples (2) attached to the surface of sample SMD's. Thermocouples will provide feedback of actual part temperatures throughout each of the 3 reflow cycles. When processing these QFN-64 parts, attaching thermocouples is not required since an established profile is already stored in the software. However, if feedback data of part temperatures is desired, thermocouples should be installed.



Figure 1: SMDs positioned on carriers inside the reflow oven

## Process

Once the SMD's have been placed inside the reflow oven, an operator selects a preset profile within the oven's software screen and clicks "Start" to begin reflow. Loading tray automatically moves inside the oven's heating chamber and heating is initiated. From this point on, [PRO 1600 Reflow Oven](#) would automatically cycle the parts 3 times without operator intervention. Data from each cycle is recorded into a raw data file as well as a graph on the software screen. Figure 2 below represents the oven's software generated graph of all 3 reflow cycles.

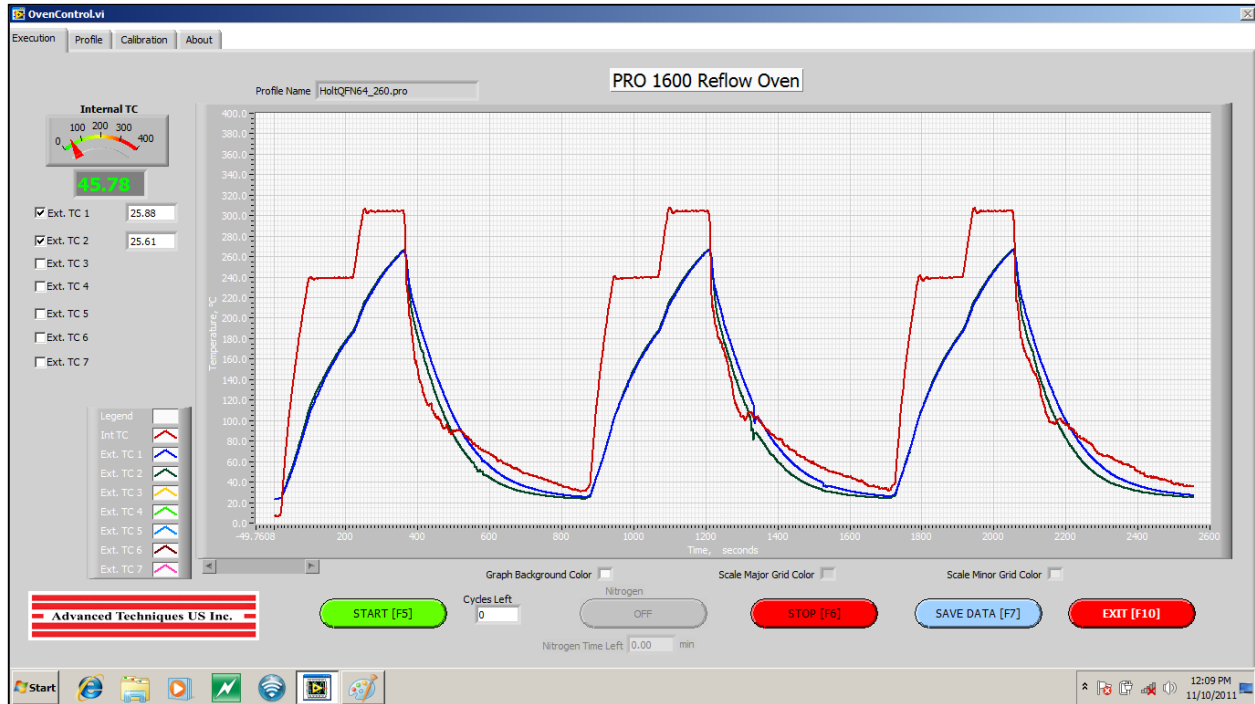


Figure 2: Software's Screenshot After Completion of 3 Solder Reflow Cycles

Screenshots of each of the 3 individual reflow cycles are outlined below. Referring to Figures 3-5: Reflow Cycle 1-3, red line (Int. TC) on the graph represents air temperature inside an oven while blue (Ext. TC1) and green (Ext. TC2) lines that are graphed close together represent the part temperatures. Graph's Y-axis represents temperature in Celsius and X-axis represents time in seconds.



Figure 3: Reflow Cycle 1

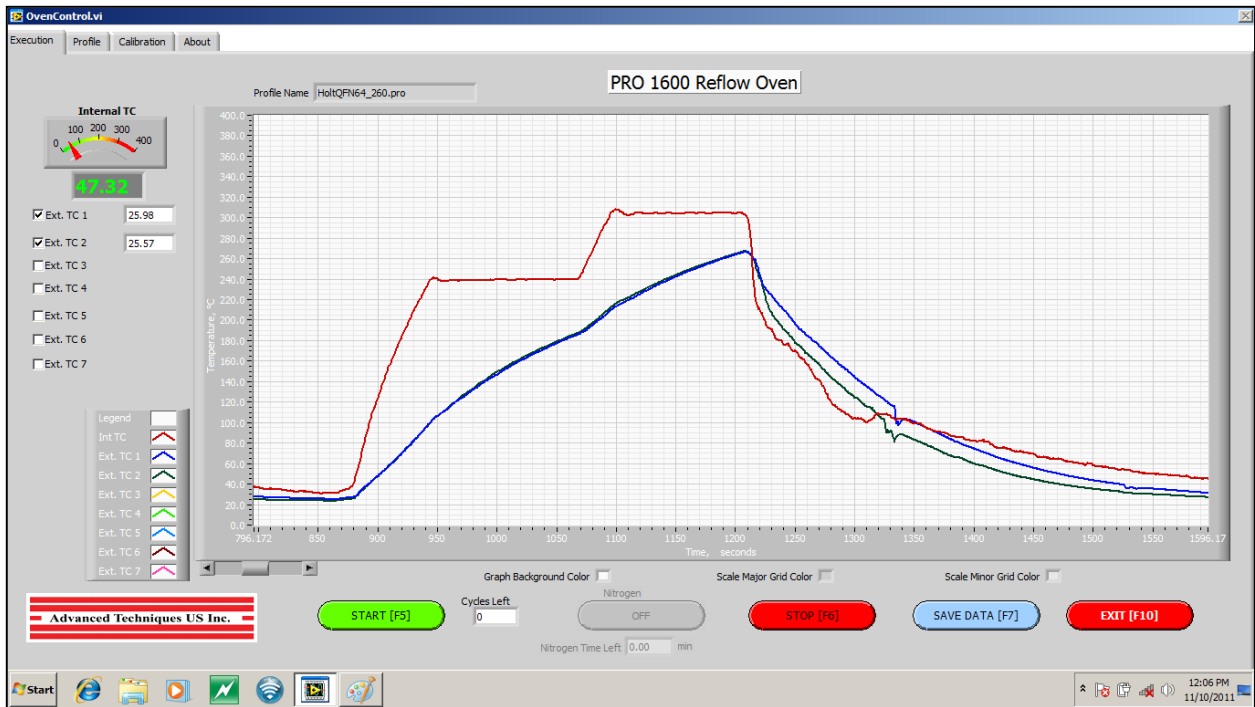


Figure 4: Reflow Cycle 2



Figure 5: Reflow Cycle 3

**Results**

Raw data from the 3 reflow cycles is saved in a single file for documentation and analysis. Results of the data show that the SMDs were subjected to reflows that met all specifications in Table 5-2 (Classification Reflow Profiles) of IPC/JEDEC J-STD-020D.1 for supplier testing of Pb-Free assembly. Target parameters were achieved throughout the 3 reflow cycles and are consistent. Tables 1 – 7 below, compare the desired parameters listed in Table 5-2 for supplier per Pb-Free Assembly of IPC/JEDEC J-STD-020D.1 vs. the data measured on each SMD (TC 1-2).

**Table 1: Preheat / Soak between 150C – 200C for 60 – 120 seconds**

	TC 1	TC 2
Reflow Cycle 1	83 seconds	85 seconds
Reflow Cycle 2	81 seconds	83 seconds
Reflow Cycle 3	81 seconds	83 seconds

**Table 2: Ramp up rate (Tl to Tp): 3 deg. C/second maximum**

	TC 1	TC 2
Reflow Cycle 1	0.55 deg. C/ second	0.54 deg. C/ second
Reflow Cycle 2	0.54 deg. C/ second	0.53 deg. C/ second
Reflow Cycle 3	0.54 deg. C/ second	0.53 deg. C/ second

**Table 3: Time above liquidous temperature (Tl:) above 217 Celsius for 60-150 seconds**

	TC 1	TC 2
Reflow Cycle 1	125 seconds	122 seconds
Reflow Cycle 2	126 seconds	122 seconds
Reflow Cycle 3	126 seconds	123 seconds

**Table 4: Peak Package body temperature (Tp): For suppliers greater than or equal to 260 Celsius**

	TC 1	TC 2
Reflow Cycle 1	265 Celsius	266 Celsius
Reflow Cycle 2	266 Celsius	267 Celsius
Reflow Cycle 3	266 Celsius	267 Celsius

**Table 5: Time within 5 deg. Celsius of peak classification temperature: at least 30 seconds**

	TC 1	TC 2
Reflow Cycle 1	38 seconds	39 seconds
Reflow Cycle 2	39 seconds	41 seconds
Reflow Cycle 3	40 seconds	42 seconds

**Table 6: Ramp down rate: 6 deg. C/second maximum**

	TC 1	TC 2
Reflow Cycle 1	-2.5 deg. C/ second	-3.2 deg. C/ second
Reflow Cycle 2	-2.6 deg. C/ second	-3.4 deg. C/ second
Reflow Cycle 3	-2.5 deg. C/ second	-3.4 deg. C/ second

**Table 7: Time from 25 Celsius to peak temperature: 8 minutes maximum**

	TC 1	TC 2
Reflow Cycle 1	~ 5 ½ minutes	~ 5 ½ minutes
Reflow Cycle 2	~ 5 ½ minutes	~ 5 ½ minutes
Reflow Cycle 3	~ 5 ½ minutes	~ 5 ½ minutes



**Conclusion**

Above data demonstrates repeatability of each reflow cycle to be within the standard's profile tolerances. Profile parameters may be adjusted to change results of the target values in above data. Substantial variation in SMDs dimensions and lot size may affect results of a profile. Therefore, individual profiles should be developed depending on the SMDs processed and their approximate lot size. [PRO 1600's](#) automated profile repeat function eliminates operator involvement during the 3 reflow cycles. This ensures consistency, prevents operator error that may jeopardize validity of the test, and provides documentation / raw data in a single file for all 3 reflows.

For additional information contact:

Advanced Techniques US, Inc.  
55 Steamwhistle Drive  
Warminster, PA 18974, USA

Tel: +1.215.364.5588

Web: [www.atco-us.com](http://www.atco-us.com)

Email: [info@atco-us.com](mailto:info@atco-us.com)

© Advanced Techniques US, Inc. 2012.